




# LIGHT TOWER JLT SERIES

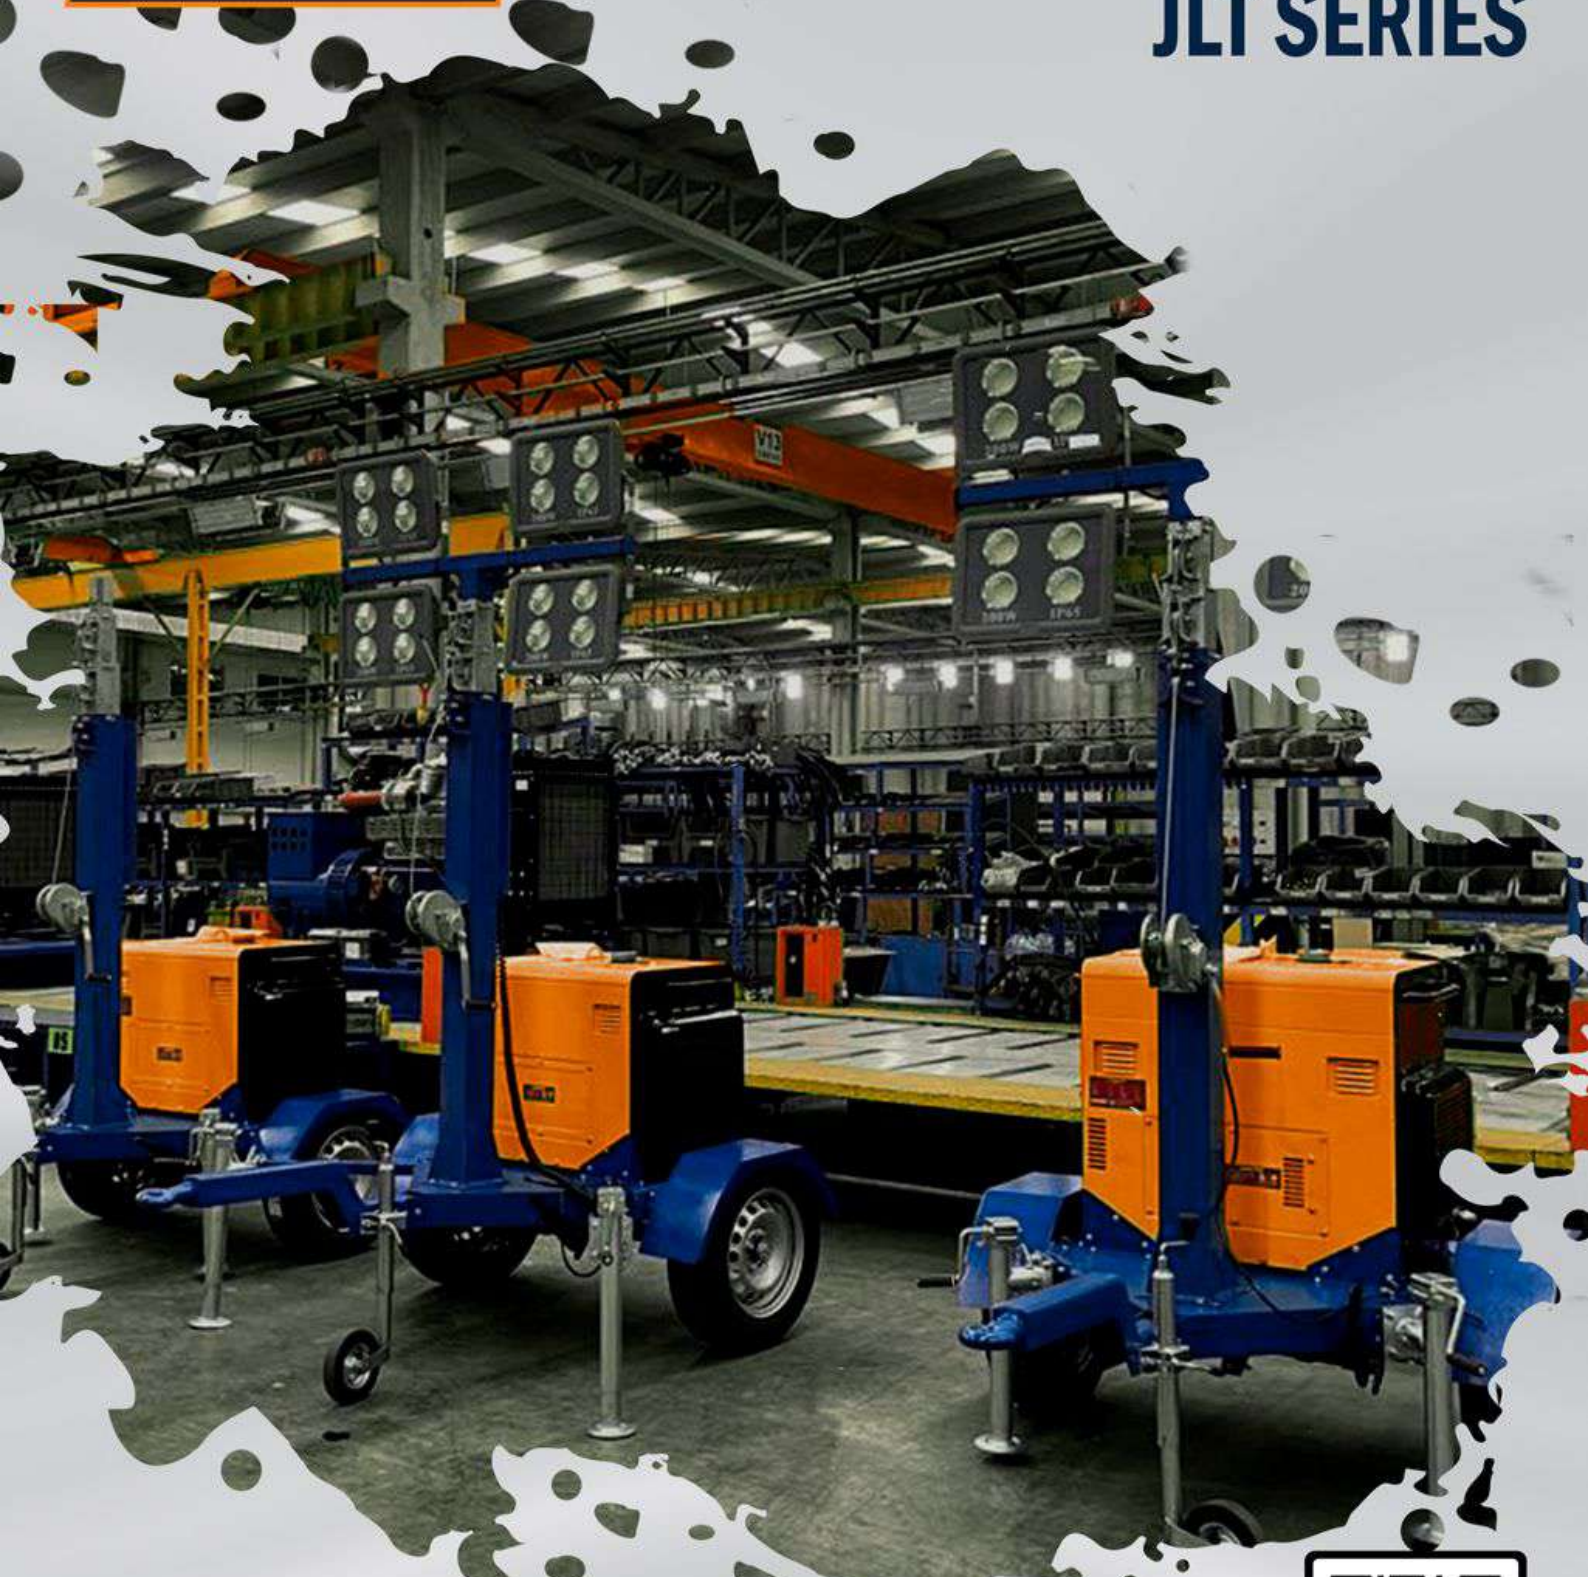

[www.jcbenergy.es](http://www.jcbenergy.es)

# JLT SERIES -- LIGHT TOWER

GROUP		JLT 7EC	JLT 9EC	JLT 12EC
<b>Number and Power of Lambs</b>		Optional 4x400W Metal Halide /4x200W Led/4x300W Led		
<b>Luminous Flux</b>	(lm)	Total 104000/200000lm		
<b>Lamb Model</b>		E40/Led	E40/Led	E40/Led
<b>Lamb Type</b>		Optional Metal Halide or LED		
<b>Lamp Protection Grade</b>		IP 65	IP 65	IP 65
<b>Mast</b>		Optional 3-4-5 section	Optional 3-4-5-6 section	
<b>Mast Driving Type</b>		Mechanical	Mechanical	Mechanical
<b>Lifting Limit</b>	(mm)	Optional 5-7 mt	Optional 5-7 mt	Optional 5-7 mt
<b>Rotation Angle of the mast</b>		Manuel	Manuel	Manuel
<b>Adjustable Angle</b>		Standard is Fixed Type – 360° Optinal		
<b>Generator Model</b>	(With canopy)	JDG 7000 EC	JDG 9500 EC	JDG 12000 EC
<b>Generator Type</b>		Single Phase with Brush Alternator		
<b>Engine Type</b>		Single Cylinder, Vertical, 4 Stroke, Air Cooled Diesel		
<b>Engine Speed</b>	(rpm)	3000/3600	3000/3600	3000/3600
<b>Engine Starting System</b>		Electric – Key Start	Electric – Key Start	Electric – Key Start
<b>Voltage</b>	(V)	230/120/240	230/120/240	230/120/240
<b>Rated Frequency</b>		50hz/60hz	50hz/60hz	50hz/60hz
<b>Insulation Class</b>		F	F	F
<b>Rated Power</b>	(kVA)	6/6,6	7,5/8,5	10/11
<b>Max. Power</b>	(kVA)	7/7,7	8,8/9,7	12/13
<b>Output Socket</b>		Single Phase Socket	Single Phase Socket	Single Phase Socket
<b>Fuel Tank Capacity</b>	(L)	30	30	30
<b>Fuel Tank Type</b>		Upper Tank	Upper Tank	Upper Tank
<b>Continuous Running Time</b>	(hrs)	20	20	15
<b>Engine Oil</b>		SAE 15W40/SAE 10W30		
<b>Dry Weight</b>	(kg)	380	395	410
<b>Dimensions</b>	(LxMxH)	1600/1100/1550	1600/1100/1550	1650x1120x1750
<b>Wheel Model</b>		185R14C	185R14C	185R14C
<b>Wheel Type</b>		Rubber Type	Rubber Type	Rubber Type
<b>Support Leg Type</b>				

## Features and Benefits

Easy Transport	Compact
Effective Using	Low Noice Level
Heavy Duty Design	Low Operating Cost
Durability	Global Technical Service and Maintenance Support



[www.jcbenergy.es](http://www.jcbenergy.es)